



Vaš izbrani izdelek.

## GIGABYTE B760M AORUS ELITE X AX, DDR5, SATA3, USB3.2GEN2X2, DP, WIFI 6E, LGA1700 MATX

ŠIFRA: GIGMB-B760MAEXAX  
232.99€

B760M AORUS ELITE X AX GIGABYTE 4719331859329


### DODATNE INFORMACIJE

<b>Weight</b>	1.1000 kg
<b>Dimensions</b>	26.5 × 7 × 7 cm
<b>Garancija mesecih</b>	36 mesecev
<b>Proizvajalec</b>	GIGABYTE



**Zaloga:** 4 na zalogi

**Kategorije:** [Osnovne plošče](#), [Računalniške komponente](#), [Računalništvo](#)

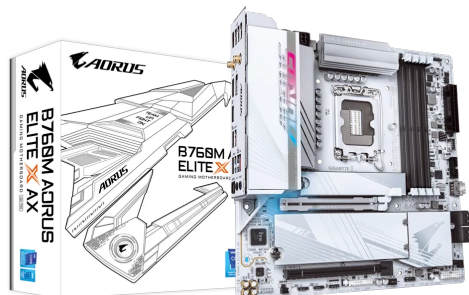



Vaš izbrani izdelek.

## OPIS IZDELKA

**PODNOŽJE:** INTEL LGA 1700

**ZA PROCESORJE:** 14/13/12th Generation Core i7/i5/i3/Pentium/Celeron

**FORMAT:** mATX format 24.4 cm x 24.4 cm

**VEZNI ČIP:** INTEL B760

**POMNILNIK:**

4 x DDR5 DIMM ECC/non-ECC 8266(O.C.) / 8200(O.C.) / 8000(O.C.) / 7950(O.C.) / 7900(O.C.) / 7800(O.C.) / 7600(O.C.) / 7400(O.C.) / 7200(O.C.) / 7000(O.C.) / 6800(O.C.) / 6600(O.C.) / 6400(O.C.) / 6200(O.C.) / 6000(O.C.) / 5800(O.C.) / 5600(O.C.) / 5400(O.C.) / 5200(O.C.) / 4800 / 4000MHz) do skupno 192GB kapacitete, dual channel in XMP podpora

**GRAFIKA:** DA - preko CPU

**RAID:** RAID 0, RAID 1, RAID 5, and RAID 10

**RAZŠIRITVENE REŽE:**

1 x PCI Express 5.0/4.0/3.0 x16

1 x PCI Express 4.0/3.0 x4

**MREŽNA KARTICA:** 2.5GbE LAN chip + Wi-Fi 6E RTL8852CE + BLUETOOTH 5.3

Realtek® Wi-Fi 6E RTL8852CE (PCB rev. 1.0/1.2)

- WIFI a, b, g, n, ac, ax, supporting 2.4/5/6 GHz carrier frequency bands

- BLUETOOTH 5.3

- Support for 11ax 160MHz wireless standard

Intel® Wi-Fi 6E AX211 (For PCB rev. 1.1/1.3)

- WIFI a, b, g, n, ac, ax, supporting 2.4/5/6 GHz carrier frequency bands

- BLUETOOTH 5.3

- Support for 11ax 160MHz wireless standard

**ZVOČNA KARTICA:** Realtek codec High Definition Audio (2/4/5.1/7.1-channel)

**NOTRANJI PRIKLJUČKI:**

1 x 24-pin ATX main power connector

1 x 8-pin ATX 12V power connector

1 x 4-pin ATX 12V power connector

1 x CPU fan header

3 x system fan headers

3 x addressable RGB Gen2 LED strip headers

1 x RGB LED strip header



2 x M.2 Socket 3 connectors

Vaš izbrani izdelek.

4 x SATA 6Gb/s connectors

1 x front panel header

1 x front panel audio header

1 x USB Type-C® header, with USB 3.2 Gen 2 support

1 x USB 3.2 Gen 1 header

2 x USB 2.0/1.1 headers

2 x Thunderbolt™ add-in card connectors

1 x Trusted Platform Module header (For the GC-TPM2.0 SPI/GC-TPM2.0 SPI 2.0/GC-TPM2.0 SPI V2 module only)

1 x HDMI port

1 x Q-Flash Plus button

1 x reset button

1 x reset jumper

1 x Clear CMOS jumper

**ZUNANJI PRIKLJUČKI:**

2 x SMA antenna connectors (2T2R)

1 x USB Type-C® port, with USB 3.2 Gen 2x2 support

1 x USB 3.2 Gen 2 Type-A port (red)

3 x USB 3.2 Gen 1 ports

4 x USB 2.0/1.1 ports

1 x HDMI port

1 x DisplayPort

1 x RJ-45 port

1 x optical S/PDIF Out connector

2 x audio jacks

**DODATNO:**

iTE® I/O Controller Chip

H/W Monitoring

Voltage detection

Temperature detection

Fan speed detection

Water cooling flow rate detection

Fan fail warning

Fan speed control

BIOS



1 x 256 Mbit flash

Vaš izbrani izdelek.

Use of licensed AMI UEFI BIOS

PnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0

Unique Features

Support for GIGABYTE Control Center (GCC)

Support for Q-Flash

Support for Q-Flash Plus

Bundled Software

Norton® Internet Security (OEM version)

LAN bandwidth management software

Spletna stran proizvajalca: <https://www.gigabyte.com/Motherboard/B760M-AORUS-ELITE-X-AX#kf>