




Vaš izbrani izdelek.

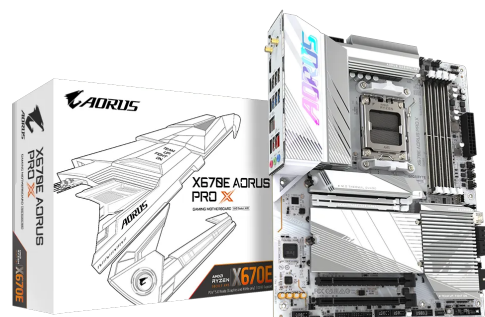

GIGABYTE X670E AORUS PRO X, DDR5, SATA3, USB3.2GEN2X2, HDMI, 2.5GBE, WIFI 7, AM5 ATX

ŠIFRA: GIGMB-X670AORPROX1
391.99€

X670E AORUS PRO X GIGABYTE 4719331859343


DODATNE INFORMACIJE

Weight	1.7000 kg
Dimensions	27 × 34 × 34 cm
Garancija mesecih	36 mesecev
Proizvajalec	GIGABYTE



Zaloga: 4 na zalogi

Kategorije: [Osnovne plošče](#), [Računalniške komponente](#),
[Računalništvo](#)



Vaš izbrani izdelek.



OPIS IZDELKA

PODNOŽJE: AMD AM5

ZA PROCESORJE: AMD Socket AM5 for AMD Ryzen™ 7000/8000 Series Desktop Processors

FORMAT: ATX format 30.5 cm x 24.4 cm

VEZNI ČIP: AMD X670

POMNILNIK:

4 x DIMM, Max. 192GB, DDR5 8000(OC)/ 7800(OC)/ 7600(OC)/ 7200(OC)/ 7000(OC)/ 6800(OC)/ 6666(OC)/ 6600(OC)/ 6400(OC)/ 6200(OC)/ 6000(OC)/ 5600(OC)/ 5200/ 4800/ 4400 MHz non-ECC Unbuffered DIMM 1Rx8/2Rx8/1Rx16 memory modules

Dual Channel Memory Architecture

Supports AMD Extended Profiles for Overclocking (EXPO™)

Extreme Memory Profile (XMP) memory modules

GRAFIKA: preko APU, če le-ta podpira

RAID: DA (0,1,10) support for SATA / NVMe SSD storage devices

RAZŠIRITVENE REŽE:

1 x PCI Express x16 slot (PCIEX16), integrated in the CPU:

- AMD Ryzen™ 7000 Series Processors support PCIe 5.0 x16 mode
- AMD Ryzen™ 8000 Series-Phoenix 1 Processors support PCIe 4.0 x8 mode
- AMD Ryzen™ 8000 Series-Phoenix 2 Processors support PCIe 4.0 x4 mode

* The PCIEX16 slot can only support a graphics card or an NVMe SSD. If only one graphics card is to be installed, be sure to install it in the PCIEX16 slot.

Chipset:

- 1 x PCI Express x16 slot, supporting PCIe 3.0 and running at x4 (PCIEX4)
- 1 x PCI Express x16 slot, supporting PCIe 3.0 and running at x2 (PCIEX2)

MREŽNA KARTICA: Intel 2.5GbE LAN chip + Qualcomm Wi-Fi 7 QCNCM865 802.11a, b, g, n, ac, ax, be, supporting 2.4/5/6 GHz + BLUETOOTH 5.3



ZVOČNA KARTICA: Realtek 7.1 Surround Sound High Definition Audio CODEC

Vaš izbrani izdelek.

NOTRANJI PRIKLJUČKI:

- 1 x 24-pin ATX main power connector
- 2 x 8-pin ATX 12V power connectors
- 1 x CPU fan header
- 1 x CPU fan/water cooling pump header
- 4 x system fan headers
- 2 x system fan/water cooling pump headers
- 3 x addressable RGB Gen2 LED strip headers
- 1 x RGB LED strip header
- 4 x SATA 6Gb/s connectors
- 4 x M.2 Socket 3 connectors
- 2 x temperature sensor headers
- 1 x front panel header
- 1 x front panel audio header
- 1 x USB Type-C® header, with USB 3.2 Gen 2x2 support
- 2 x USB 3.2 Gen 1 headers
- 2 x USB 2.0/1.1 headers
- 1 x noise detection header
- 1 x THB_U4 add-in card connector
- 1 x HDMI port
- * Only available with the AMD Radeon™ Graphics Processors.
- 1 x Trusted Platform Module header (For the GC-TPM2.0 SPI/GC-TPM2.0 SPI 2.0/GC-TPM2.0 SPI V2 module only)
- 1 x power button
- 1 x reset button
- 1 x Clear CMOS button
- 1 x reset jumper
- 1 x Clear CMOS jumper

ZUNANJI PRIKLJUČKI:

- 1 x Q-Flash Plus button
- 2 x SMA antenna connectors (2T2R)
- 1 x HDMI port
- 4 x USB 3.2 Gen 1 ports
- 4 x USB 2.0/1.1 ports
- 3 x USB 3.2 Gen 2 Type-A ports (red)
- 1 x USB Type-C® port, with USB 3.2 Gen 2x2 support
- 1 x RJ-45 port



3 x audio jacks
Vaš izbrani izdelek.
DODATNO:

iTE® I/O Controller Chip
H/W Monitoring
Voltage detection
Temperature detection
Fan speed detection
Water cooling flow rate detection
Fan fail warning
Fan speed control
Noise detection
BIOS
1 x 256 Mbit flash
Use of licensed AMI UEFI BIOS
PnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0
Unique Features
Support for GIGABYTE Control Center (GCC)
Support for Q-Flash
Support for Q-Flash Plus
Support for Smart Backup
Bundled Software
Norton® Internet Security (OEM version)
LAN bandwidth management software

Spletna stran proizvajalca: <https://www.gigabyte.com/Motherboard/X670E-AORUS-PRO-X#kf>