

Vaš izbrani izdelek.



UBIQUITI POE INJECTOR, 24VDC, 24W, GBIT

ŠIFRA: UBINT-132

16.99€

POE-24-24W-G-WH UBIQUITI 817882022545

DODATNE INFORMACIJE

Weight 0.1600 kg

Dimensions 3.5 × 9.6 × 9.6 cm


**Garancija
mesecev** 12 mesecev

Proizvajalec UBIQUITI



Zaloga: 8 na zalogi

Kategorije: [Mrežna oprema](#), [PoE](#)

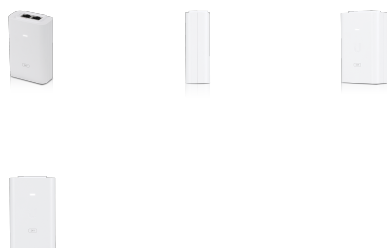

Vaš izbrani izdelek.



OPIS IZDELKA

Ubiquiti PoE adapterji nudijo različne funkcije za zaščito vaših naprav PoE:

- Prenapetostna zaščita
- Zaščita pred vpenjanjem
- Največja prenapetostna razelektritev
- Najvišji impulzni tok
- AC kabel z ozemljitvijo

Elektrostatična razelektritev (ESD) je glavni vzrok za okvare zunanjih naprav.

Z ozemljenim adapterjem Ubiquiti PoE, TOUGH Cable™ in TOUGH Cable konektorji se lahko učinkovito zaščitite pred poškodbami zaradi ESD.

Specifikacije:

POE-24-24W-G

Dimensions	96 x 62 x 35 mm (3.78 x 2.44 x 1.38")
Weight	166 g (5.86 oz)
Output Voltage	24VDC @ 1.0A
LAN Activity Indicator	No
Gigabit LAN Port	Yes
Remote Reset Capability	Yes
Reset Button	Yes
Rated Voltage	100-240VAC @ 50/60Hz
Input Current	750mA @ 90VAC



Inrush Current	<100A Peak @ 25°C
Efficiency	86.2+%
Output Ripple	200mV p-p
Switching Frequency	65 kHz
Line Regulation	≤ 3%
Load Regulation	≤ 5%
2-Pair Powering	Pins 4, 5 (+) and Pins 7, 8 (-)
4-Pair Powering	-
Operating Temperature	0 to 40° C (32 to 104° F)
Storage Temperature	-30 to 70°C (-22 to 158° F)
Operating Humidity	5 to 95% Noncondensing
AC Connector	IEC-320 C6
Data IN / POE	RJ45 Shielded Socket
Surge Protection	Difference and Common Mode
Clamping Protection	11V Data, 60V Power
Max. Surge Discharge	1500A (8/20 μs) Power
Peak Pulse Current	36A (10/1000 μs) Data
Shunt Capacitance	<5 pF data
Response Time	<1 ns
Certifications	CE, FCC, IC, UL